Product data sheet

Specifications





discrete input module Modicon Quantum - 16 I - 24 V AC

140DAI34000

- ! Discontinued on: 31/12/2022
- ! To be end-of-service on: 31/12/2030

(!) To be discontinued

Main

Range Of Product	Modicon Quantum automation platform
Product Or Component Type	VAC discrete input modules
Software Name	Concept ProWORX 32 Unity Pro
Discrete Input Number	16

Complementary

Group Of Channels	16
Addressing Requirement	1 input word
Discrete Input Voltage	24 V AC
Input Current	12 mA at 5763 Hz 10.7 mA at 4753 Hz
Voltage State 1 Guaranteed	1630 V AC at 5763 Hz 1830 V AC at 4753 Hz
Voltage State 0 Guaranteed	06 V at 5763 Hz 05 V at 4753 Hz
Input Impedance	2600 Ohm capacitive at 5763 Hz 3100 Ohm capacitive at 4753 Hz
Network Frequency Limits	4763 Hz
Maximum Leakage Current	1.9 mA
Absolute Maximum Input	30 V continuous 32 V 10 s 50 V 1 cycle
Response Time	4.90.75 ms x line cycle Off-On 7.312.3 ms On-Off
Isolation Between Channels	1780 Vrms for 1 minute
Isolation Between Channels And Bus	1780 Vrms for 1 minute
Bus Current Requirement	180 mA
Maximum Power Dissipation In W	5.5 W
Local Signalling	LED (green) for bus communication is present (Active) LED (red) for external fault detected (F) 16 LEDs (green) for input status
Marking	CE
Module Format	Standard

Net Weight 0.3 kg

Environment

Standards	CSA C22.2 No 142 UL 508
Product Certifications	cUL FM Class 1 Division 2
Resistance To Electrostatic Discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance To Electromagnetic Fields	10 V/m 802000 MHz conforming to IEC 801-3
Ambient Air Temperature For Operation	060 °C
Ambient Air Temperature For Storage	-4085 °C
Relative Humidity	95 % without condensation
Operating Altitude	<= 5000 m

Packing Units

_	
Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	16.3 cm
Package 1 Width	4.5 cm
Package 1 Length	31.2 cm
Package 1 Weight	443.0 g
Unit Type Of Package 2	S02
Number Of Units In Package 2	2
Package 2 Height	15.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	878.0 g

Contractual warranty

Warranty 18 months



Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



RoHS/REACh

Well-being performance

②	Reach Free Of Svhc	
⊘	Mercury Free	
⊘	Rohs Exemption Information	Yes


Certifications & Standards

Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
	EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

Dimensions Drawings

Racks for Modules Mounting

Dimensions of Modules and Racks

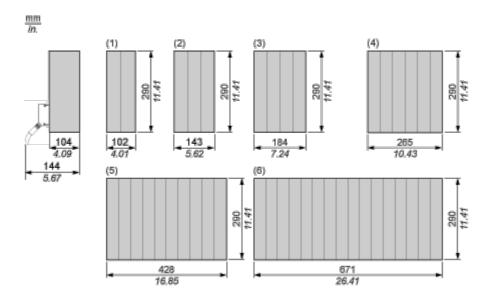


- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

Connections and Schema

24 Vac Discrete Input Module

Wiring Diagram

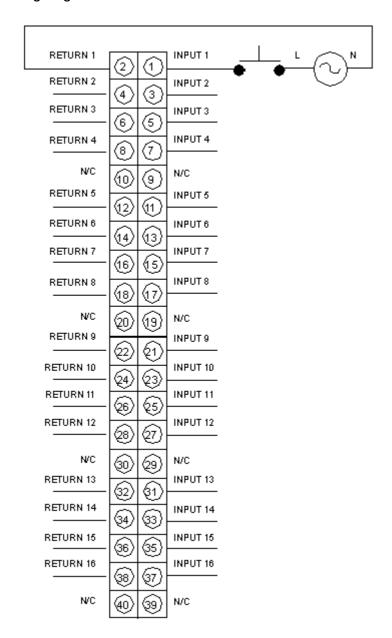

N/C Not Connected