Product data sheet

Specifications





Head for pilot light, Harmony XB5, metal, red, 22mm, plain lens for BA9s bulb

ZB5AV04

Main

| Range Of Product | Harmony XB5 |
|---------------------------------|----------------------|
| Product Or Component Type | Head for pilot light |
| Product Compatibility | BA 9s |
| Device Short Name | ZB5 |
| Bezel Material | Dark grey plastic |
| Mounting Diameter | 22 mm |
| Head Type | Standard |
| Sale Per Indivisible Quantity | 1 |
| Shape Of Signaling Unit Head | Round |
| Cap/Operator Or Lens Colour | Red |
| Operator Additional Information | With plain lens |

Complementary

| Cad Overall Width | 29 mm |
|-----------------------------|--|
| Cad Overall Height | 29 mm |
| Cad Overall Depth | 31 mm |
| Net Weight | 0.018 kg |
| Station Name | XALD 15 cut-outs XALK 25 cut-outs |
| Electrical Composition Code | P3 in front mounting with BA 9s P4 in front mounting with BA 9s and transformer PF2 in front mounting with BA 9s |
| Device Presentation | Basic element |

Environment

| Protective Treatment | TH | |
|---------------------------------------|--|--|
| Ambient Air Temperature For Storage | -4070 °C | |
| Ambient Air Temperature For Operation | • | |
| Overvoltage Category | Class II conforming to IEC 60536 | |
| Ip Degree Of Protection | IP66 conforming to IEC 60529 IP67 conforming to IEC 60529 IP69 conforming to IEC 60529 IP69K conforming to ISO 20653 | |
| Nema Degree Of Protection | NEMA 13 NEMA 4X | |

| Resistance To High Pressure Washer | 7000000 Pa at 55 °C, distance : 0.1 m | | | |
|------------------------------------|--|--|--|--|
| Ik Degree Of Protection | IK05 conforming to IEC 50102 | | | |
| Standards | IEC 60947-5-1 | | | |
| | CSA C22.2 No 14 | | | |
| | IEC 60947-5-5 | | | |
| | IEC 60947-5-4 | | | |
| | JIS C8201-5-1 | | | |
| | IEC 60947-1 | | | |
| | UL 508 | | | |
| | JIS C8201-1 | | | |
| Vibration Resistance | 5 gn (f= 2500 Hz) conforming to IEC 60068-2-6 | | | |
| Shock Resistance | 30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC | | | |
| | 60068-2-27 | | | |
| | 50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC | | | |
| | 60068-2-27 | | | |

Packing Units

Contractual warranty

Warranty 18 months



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance


| Ø | Reach Free Of Svhc | |
|----------|----------------------------|-----|
| ⊘ | Toxic Heavy Metal Free | |
| Ø | Mercury Free | |
| ⊘ | Rohs Exemption Information | Yes |

Certifications & Standards

| Reach Regulation | REACh Declaration |
|--------------------------|---|
| Eu Rohs Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| China Rohs Regulation | China RoHS declaration |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End of Life Information |

Dimensions Drawings


Dimensions



Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)


Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board

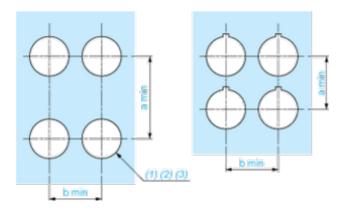

- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended (Ø22.3 $_0^{+0.4}$) / Ø0.89 in. recommended (Ø0.88 in. $_0^{+0.016}$)

| | | | | 0 |
|---|---------|----------|---------|----------|
| Connections | a in mm | a in in. | b in mm | b in in. |
| By screw clamp terminals or plug-in connector | 40 | 1.57 | 30 | 1.18 |
| By Faston connectors | 45 | 1.77 | 32 | 1.26 |
| On printed circuit board | 30 | 1.18 | 30 | 1.18 |


Detail of Lug Recess



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended (Ø22.3 $_0^{+0.4}$) / Ø0.89 in. recommended (Ø0.88 in. $_0^{+0.016}$)

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


Panel Cut-outs (Viewed from Installer's Side)

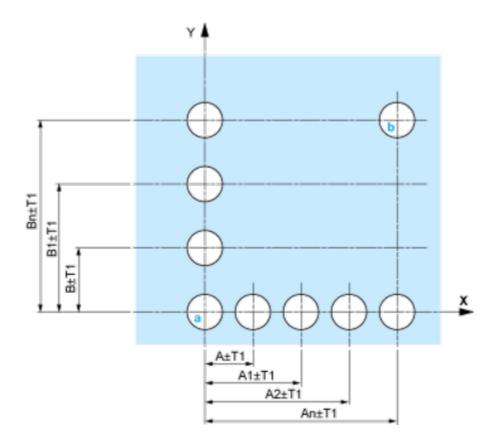


A: 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

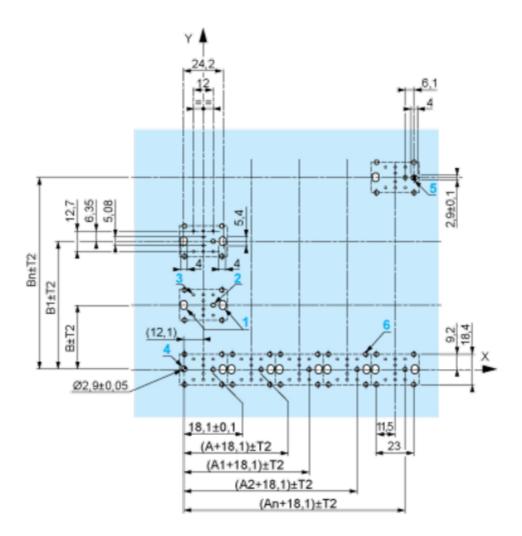

A: 30 mm min. B: 40 mm min. Dimensions in in.

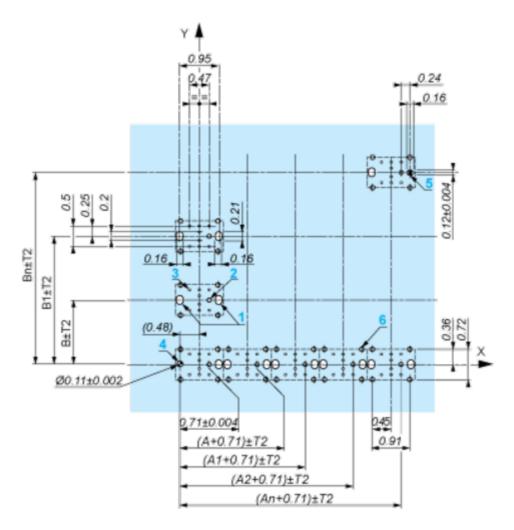

A: 1.18 in. min. **B:** 1.57 in. min.


General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in.: T1 + T2 = 0.3 mm max.

Installation Precautions

- $_{\bullet}\,$ Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB5AZ009: ± 2 30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
 - $_{\circ}\;$ every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - o with each selector switch head (ZB5AD•, ZB5AJ•, ZB5AG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

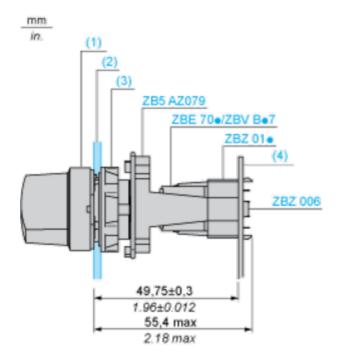

- (1) Head ZB5AD•
- (2) Panel
- (2) Nut
- (4) Printed circuit board

Mounting of Adapter (Socket) ZBZ01•

- 1 2 elongated holes for ZBZ006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ01•

Dimensions An + 18.1 relate to the Ø 2.4 mm \pm 0.05 / 0.09 in. \pm 0.002 holes for centring adapter ZBZ01•.

Technical Description

Electrical Composition Corresponding to Codes P1, P3, PF1, PR1 and PF2

Light block



Electrical Composition Corresponding to Code P4



Legend

Single contact



Double contact



Light block



Possible location

